

Modemas Huawei E5573S – 320 WIFI LTE


Modemo įdiegimas ir prisijungimas

Modemą prijungus per USB arba prisijungus per WiFi prie interneto atidaromas naršyklės langas adresu <http://192.168.8.1/html/home.html>

Prisijunkite šiais duomenimis:

Vartotojo vardas: **admin**

slaptažodis: **admin**

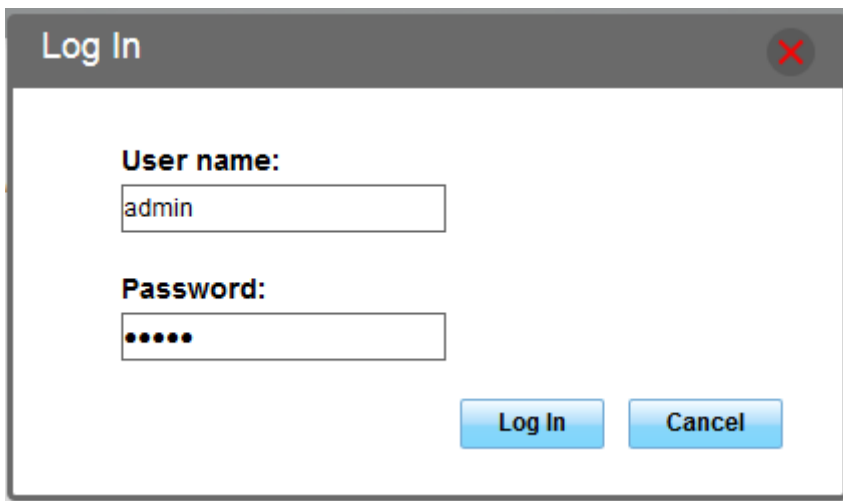

A screenshot of a 'Log In' dialog box. It has a title bar with 'Log In' and a close button. Inside, there are two input fields: 'User name:' with 'admin' entered, and 'Password:' with six dots. At the bottom right are 'Log In' and 'Cancel' buttons.

Įvedus kodą pateikiamas prisijungimo langas




A screenshot of the Huawei E5573S web interface. At the top is the Huawei logo and 'HUAWEI' text. To the right are links for 'English', 'Help', 'admin', and 'Log Out'. Below this is a navigation bar with 'Home', 'Statistics', 'SMS', 'USSD', 'Update', 'Settings', and 'App Management'. The main area shows a bar chart, the text 'Tele2', and 'Connected' with a red arrow pointing to it (labeled 1). Below 'Connected' is a link for 'Connection Settings'. There are three status icons: a power button (labeled 3), a network icon (labeled 4), and a Wi-Fi icon (labeled 5). A red arrow points to the '4G' text (labeled 2). At the bottom left, 'Current connection' shows 'Received/Sent: 3.66 MB / 2.03 MB' and 'Duration: 00:02:11' with a red arrow pointing to it (labeled 6). At the bottom right, 'WLAN status' shows 'WLAN status: On' and 'Current WLAN user: 0'.

1. Connected / Disconnected – prisijungimo statusas.
2. Prisijungimo technologija – 2G / 3G / 4G
3. Modemo išjungimas / įjungimas


4. Duomenų persiuntimo įjungimas ir išjungimas
5. WiFi įjungimas / išjungimas
6. Duomenų persiuntimo sesijos trukmė ir persiūtų duomenų kiekis

Profilio konfigūracija

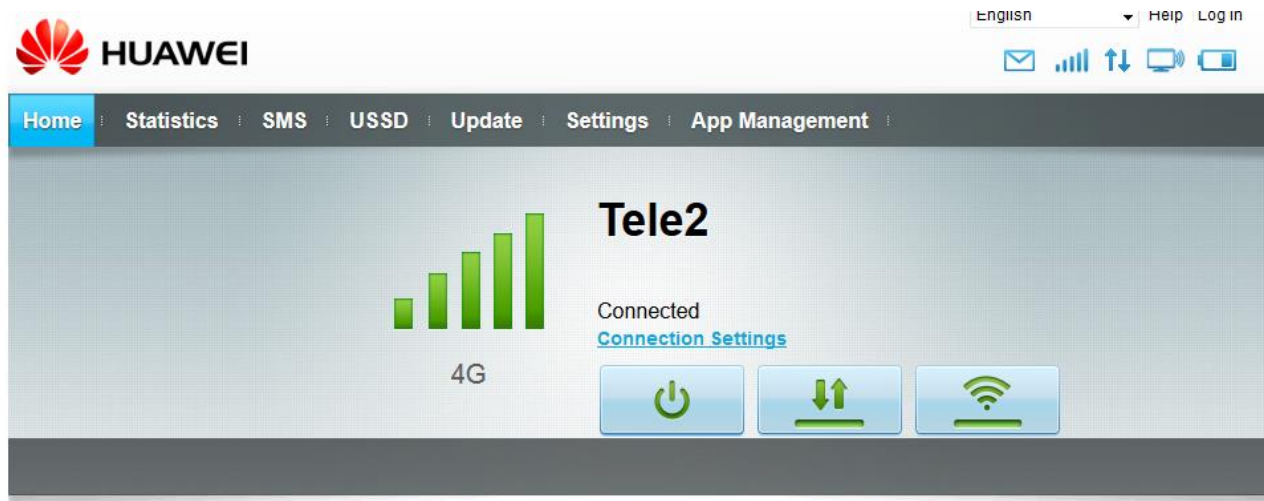

Prisijungimo profilio kūrimas (pakeitimai daromi atsijungus nuo interneto)

Connection Settings – Profile management

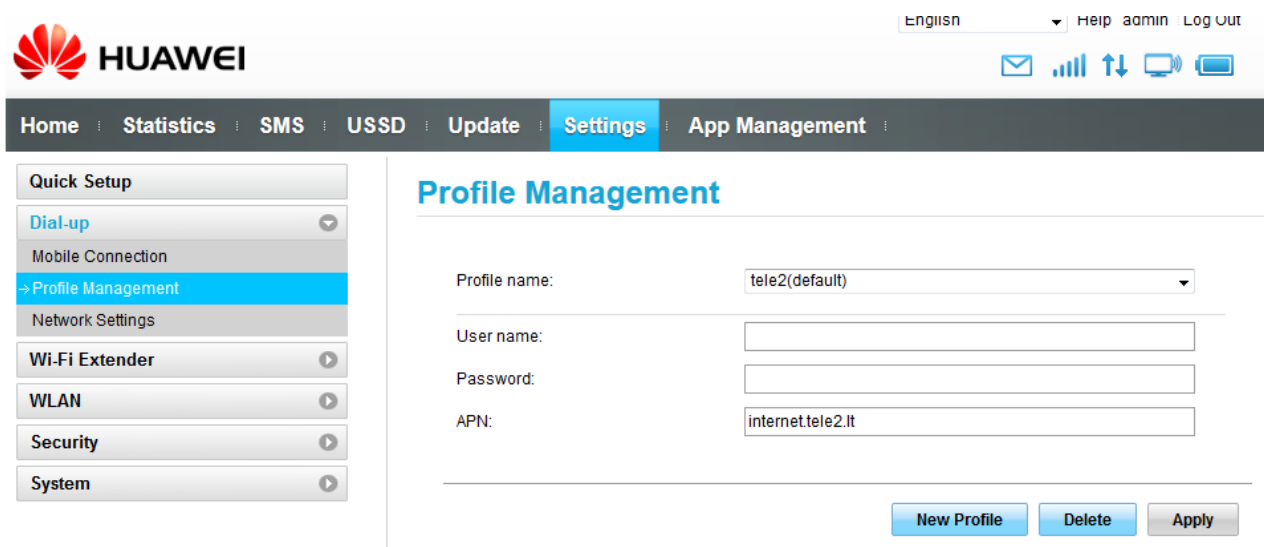

Naujo profilio sukūrimas paspaudus NEW PROFILE ir suvedami duomenys:

New Profile

Profile name:

User name:

Password:


APN:

Profilio sukūrimas priklauso nuo naudojamos SIM. Gali būti naudojamas APN:

- internet.TELE2.lt (jei naudojama SIM su balso paslaugomis, pvz. su planu *Neriboti pokalbiai, SMS ir 2 GB*)
- mobileinternet.tele2.lt (jei naudojama SIM su laisvo interneto planu)
- static.tele2.lt (jei esate užsisakę statinio IP paslaugą)

Suvedus parametrus spaudžiame **SAVE** ir pasirenkame sukurtą profilį iš **Profile name** iškrentančio sąrašo.

Technologijos ir tinklo pasirinkimai

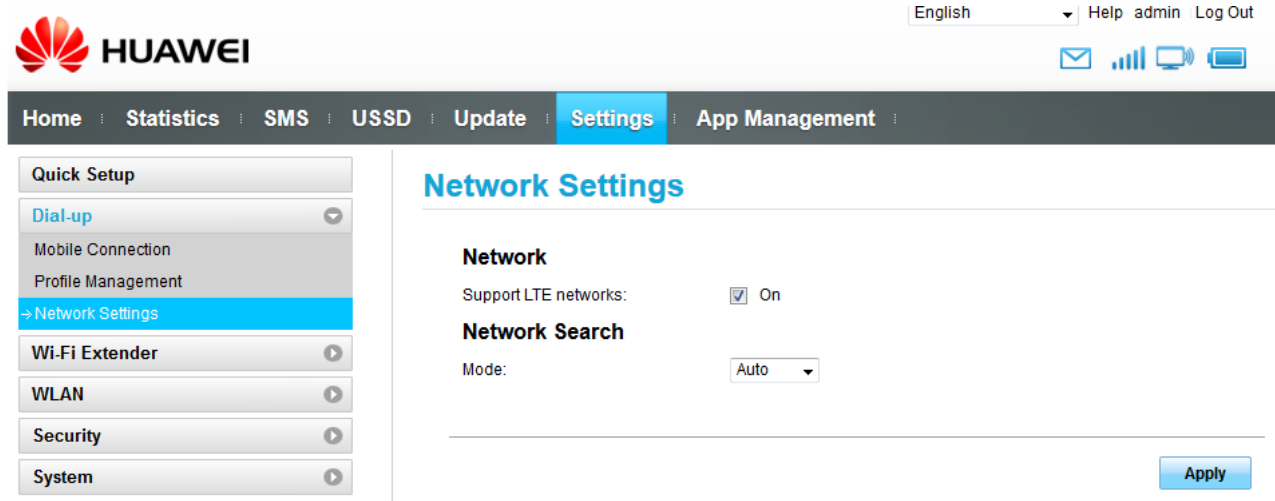

The screenshot shows the Huawei Settings application interface. At the top, there is a header bar with the Huawei logo, the word "HUAWEI", and a language dropdown menu set to "English". To the right of the language menu are links for "Help", "admin", and "Log Out". Below the header is a navigation bar with tabs: "Home", "Statistics", "SMS", "USSD", "Update", "Settings" (which is highlighted in blue), and "App Management". On the left side of the "Settings" screen is a sidebar menu with options: "Quick Setup", "Dial-up" (highlighted in blue), "Mobile Connection", "Profile Management", "→ Network Settings" (highlighted in blue), "Wi-Fi Extender", "WLAN", "Security", and "System". The main content area is titled "Network Settings" in blue. It contains two sections: "Network" with a toggle for "Support LTE networks" set to "On", and "Network Search" with a "Mode:" dropdown menu set to "Auto". At the bottom right of the "Network Search" section is a blue "Apply" button.

Settings – Dial-up –Network settings : varnelė prie Support LTE network yra 4G/LTE jungimas. Pasirinkti tik 2G nėra galimybės. Modemas pats renka tarp 4G/3G/2G arba 3G/2G priklausomai nuo pasirinkimo.

Po pakeitimų spaudžiame **APPLY**.

Išplėstiniai prisijungimo parametrai

Settings – Mobile Connection

English Help admin Log Out

Home Statistics SMS USSD Update Settings App Management

Quick Setup

Dial-up

→ Mobile Connection

Profile Management

Network Settings

Wi-Fi Extender

WLAN

Security

System

Mobile Connection

Mobile Connection:

Mobile data Turn On

When the mobile network is turned on, the device connects to the network automatically.

Data roaming: ☐ Enable ☒ Disable

Auto Disconnect Interval (Min): 10 5 10 20 120

Apply

Mobile Data – Turn on/Turn OFF indikuoja automatinį prisijungimą prie interneto prijungus USB modemą. Esant pasirinkimui TURN ON prisijungimas daromas automatiškai.

Data Roaming – enable (įjungti)/ disable (išjungti) nurodo įrenginio leidimą registruotis prie užsienio oper. tinklų užsienyje (angl. roaming).

Auto Disconnected Interval (min) **automatinis** atsijungimas nuo interneto, nevykstant duomenų persiuntimui po 5/10/20/120 minučių. Modemui atsijungus reikia atlikti prisijungimą iš naujo.

WiFi nustatymai

Settings – WLAN – WLAN Basic Settings

HUAWEI

Home Statistics SMS USSD Update Settings App Management

Quick Setup
Dial-up
Wi-Fi Extender
WLAN
→ WLAN Basic Settings
WLAN Advanced Settings
WLAN MAC Filter
DHCP
Security
System

WLAN Basic Settings

If the Security mode is set to WEP, a wireless network adapter working in only 802.11n mode may not be able to access the device.

SSID: HUAWEI-0F8E 1

Security mode: WPA2-PSK 2

WPA pre-shared key: 3

☐ Show password

SSID Broadcast: ☒ Enable ☐ Disable 4

Note: If SSID broadcast is disabled, you must enter a valid SSID to connect to a Wi-Fi network. For details, see the [Help](#).

Apply

1. SSID – norimas WiFi tinklo vardas
2. Security mode - slaptažodžio kodavimo tipas (rekomenduojame palikti nustatytą)
3. WPA pre-shared key - norimas WiFi tinklo slaptažodis
4. SSID Broadcast – WiFi tinklo paieškoje rodomas arba slepiamas WiFi tinklo prisijungimo vardas (rekomenduojame naudoti įjungtą/enable)

Papildomi nustatymai modeme

PIN kodo įjungimas arba išjungimas

Home Statistics SMS USSD Update Settings App Management

Quick Setup
Dial-up
Wi-Fi Extender
WLAN
Security
→ PIN Management
Firewall Switch
LAN IP Filter
Virtual Server

PIN Management

PIN operation: Enable

PIN code:

Remaining attempts: 3

Apply

Settings - System

- Device Information – įrenginio informacija (IMEI kodas ir kita)
- Modify Password – įrenginio administratoriaus kodo pakeitimas

[Home](#) | [Statistics](#) | [SMS](#) | [USSD](#) | [Update](#) | **[Settings](#)** | [App Management](#)

[Quick Setup](#)
[Dial-up](#)
[Wi-Fi Extender](#)
[WLAN](#)
[Security](#)
[System](#)
Device Information
→ [Modify Password](#)
Restore Defaults
Reboot

Modify Password

Current password:

New password:

Password strength: Low Middle High

Confirm password:

☐ Do not remind after login if password strength is low

[Apply](#)

- Restore Defaults – atstatyti gamyklinius parametrus

[Home](#) | [Statistics](#) | [SMS](#) | [USSD](#) | [Update](#) | **[Settings](#)** | [App Management](#)

[Quick Setup](#)
[Dial-up](#)
[Wi-Fi Extender](#)
[WLAN](#)
[Security](#)
[System](#)
Device Information
Modify Password
→ [Restore Defaults](#)
Reboot

Restore Defaults

Click the button below to restore device to its factory settings.

[Restore](#)

- Reboot – perkrauti, neatjungus nuo kompiuterio.



English | [Help](#) | [admin](#) | [Log Out](#)

[Home](#) | [Statistics](#) | [SMS](#) | [USSD](#) | [Update](#) | **[Settings](#)** | [App Management](#)

[Quick Setup](#)
[Dial-up](#)
[Wi-Fi Extender](#)
[WLAN](#)
[Security](#)
[System](#)
Device Information
Modify Password
Restore Defaults
→ [Reboot](#)

Reboot

Click the button below to restart the device.

[Reboot](#)