

Fiksuoto IP nustatymas

1. Prisijungiame prie modemo bevielio (WiFi) tinklo
2. Prisijungiame prie modemo įvedant naršyklėje 192.168.8.1 adresą, adresų vedimo lauke
3. Prisijungę prie modemo valdymo aplinkos spaudžiame ant meniu pasirinkimo „Settings“

The screenshot displays the Tele2 LT modem management web interface. At the top, the 'TELE2' logo is on the left, and 'English', 'Help', and 'Log In' links are on the right. Below the logo is a navigation bar with 'Home', 'Statistics', 'SMS', 'Update', 'Settings' (highlighted with a red box), and 'More'. The main content area features a 'Tele2 LT' header, a 4G signal strength indicator, and a 'Connected' status with a 'Connection Settings' link. Below this, there are two sections: 'Current connection' and 'WLAN status'. The 'Current connection' section shows 'Received/Sent: 123.53 KB / 89.39 KB', 'Duration: 01:45:51', and 'My number: Unknown'. The 'WLAN status' section shows 'WLAN status: On' and 'Current WLAN user: 1'. At the bottom, there is a footer with 'Privacy Policy', a copyright notice 'COPYRIGHT (C) 2006-2015 HUAWEI TECHNOLOGIES CO.,LTD. ALL RIGHTS RESERVED.', and a 'Copyright Notice' link.

TELE2 English Help Log In

Home Statistics SMS Update **Settings** More

Tele2 LT

4G

Connected
[Connection Settings](#)

Current connection

Received/Sent:	123.53 KB / 89.39 KB
Duration:	01:45:51
My number:	Unknown

WLAN status


WLAN status:	On
Current WLAN user:	1

Privacy Policy | COPYRIGHT (C) 2006-2015 HUAWEI TECHNOLOGIES CO.,LTD. ALL RIGHTS RESERVED. | Copyright Notice


4. Iššokusiam lange suvedame modemo administratoriaus prisijungimo duomenis. Jeigu prisijungimo duomenys nebuvo keisti jie yra:

Prisijungimo vardas: admin

Prisijungimo slaptažodis: admin

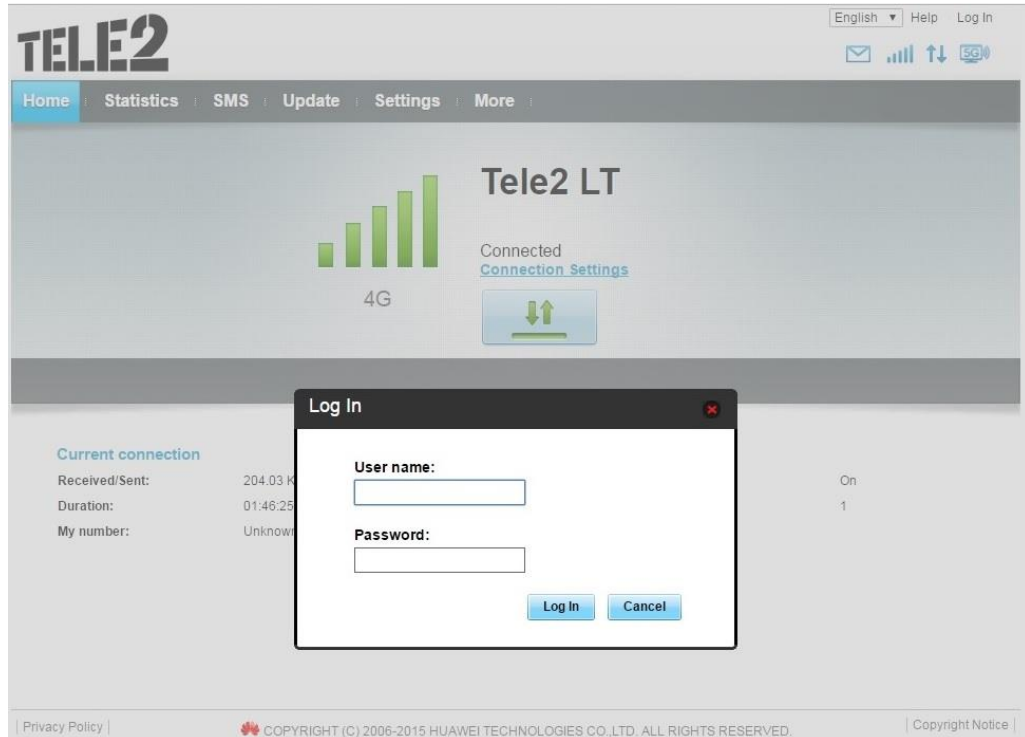

5. Atsidariusiam lange spaudžiame „New Profile“ mygtuką

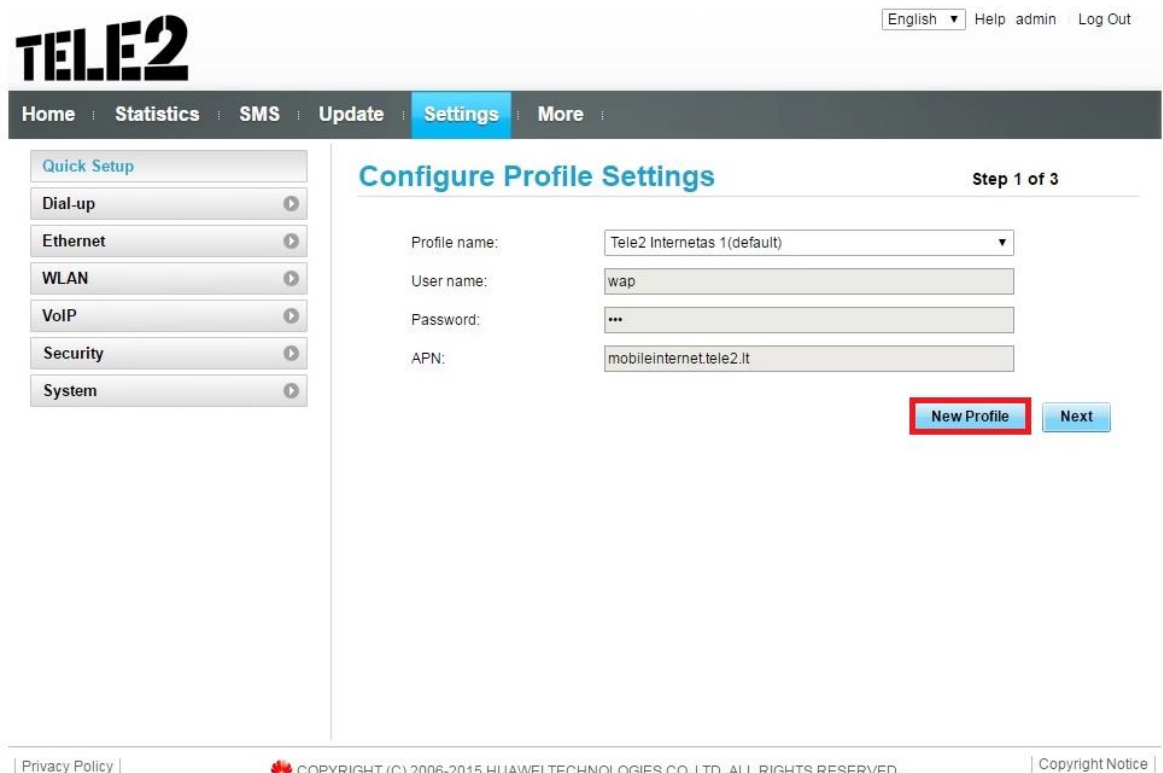

6. Įvedame sugalvotą profilio pavadinimą ir static.tele2.lt APN adresą ir spaudžiame „Save“ mygtuką

The screenshot displays the TELE2 web interface. At the top, there is a header with the TELE2 logo, a language dropdown set to 'English', and links for 'Help', 'admin', and 'Log Out'. Below the header is a navigation bar with links: 'Home', 'Statistics', 'SMS', 'Update', 'Settings' (highlighted), and 'More'. On the left side, there is a 'Quick Setup' menu with links to 'Dial-up', 'Ethernet', 'WLAN', 'VoIP', 'Security', and 'System'. The main content area is titled 'Configure Profile Settings' and indicates 'Step 1 of 3'. It contains four input fields: 'Profile name:' with a dropdown menu showing 'Tele2 Internetas 1 (default)', 'User name:' with the text 'wap', 'Password:' with masked characters '***', and 'APN:' with the text 'mobileinternet.tele2.lt'. To the right of these fields are 'New Profile' and 'Next' buttons. A 'New Profile' dialog box is open in the foreground, featuring a title bar with a close button. It has four input fields: 'Profile name:' with the text 'Static TELE2', 'User name:', 'Password:', and 'APN:' with the text 'static.tele2.lt'. The 'APN' field and its text are highlighted with a red rectangle. At the bottom of the dialog are 'Save' and 'Cancel' buttons. The footer of the page includes a 'Privacy Policy' link, a copyright notice for HUAWEI TECHNOLOGIES CO., LTD. (2006-2015), and a 'Copyright Notice' link.

Naujas profilis išsaugotas ir modemas iš naujo inicijuoja prisijungimą su naujai sukurtu fiksuoto IP APN adresu.